




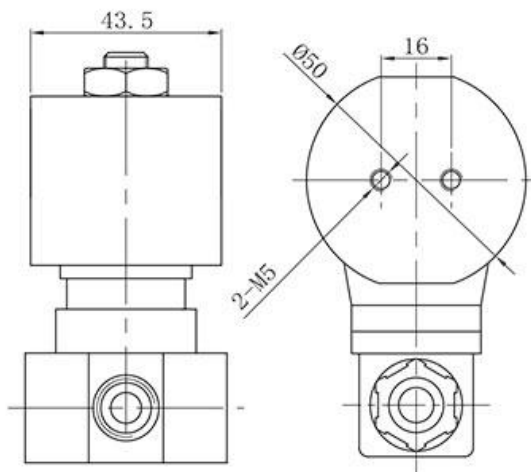

1			2	3	4	5	6	7	8
Sc75			Coil Types	Voltage	Seal Material	Body Material	Pipe Size	Orifice	Options
S	C	75	M	A20	K	40	01	01	N
S= Special valve	C= Normally Closed	75= High Pressure Solenoid Valve	M= Low power coil (Surge junction box)	A10=AC110V A20=AC220V D12=DC12V D24=DC24V	8mm (VITOM) K=PEEK	40=SS316	01=1/8 02=1/4" 03=3/8" 04=1/2" 05=3/4" 06=1"	01=1.0 08=8.0 10=10 15=15 20=20 25=25 R1=1.2 R2=1.5	L=Neon Lamp N=NPT Thread

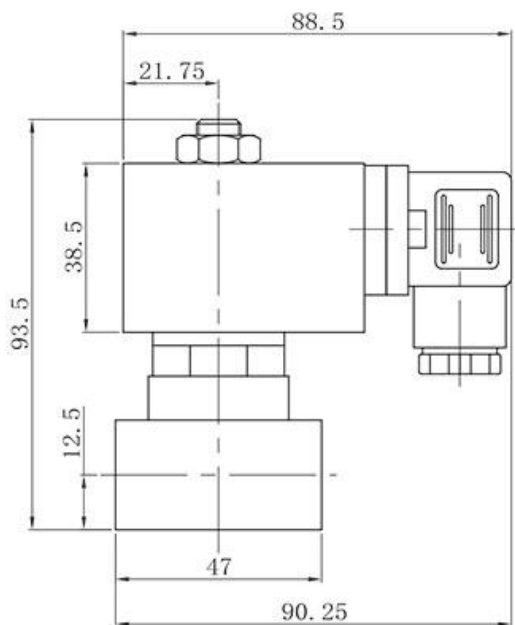

Φ1-1.5

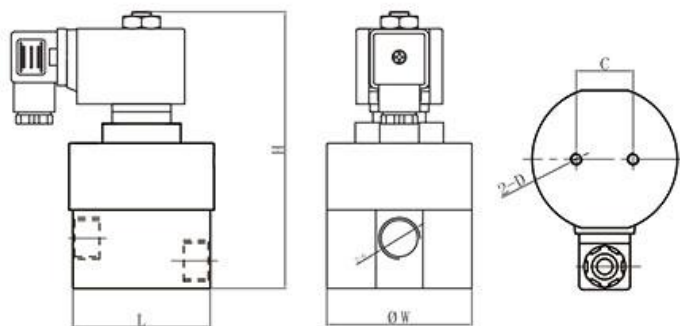

MODEL	G	L	W	H	C	D
SC75-10	1/4.3/8.1/2	70	74	141	29	M6
SC75-15	3/8.1/2	70	74	141	29	M6
SC75-20	3/4	79	84	150	36	M6
SC75-25	1	93	99	160	45	M8

Characteristics

1. 2/2-way Super High Pressure Solenoid Valve, closed when de-energized, open when energized.
2. The product is special design, power will be normal type 1/4, low temperature, small in size, large flow rate, widely use.
3. Body material: Stainless Steel
4. Ambient temp.: 0°C~65°C Fluids temp.: 0°C~110°C
5. Flow as the arrow, mounts in any position; Best position is solenoid and upright direction.
6. Voltage: AC 220V/230V/110V DC 24V
Voltage Tolerance: +10% to -10% applicable voltage
- 7 seal material is PTFE (PEEK), 8mm (Viton)
8. It is normal for solenoid valve to have micro leakage under 20 bar pressure



Valve Selection Lis

Pipe Size G	Orifice mm	CV rate	Pressure (bar)				Coil Type	Power		Externsions Dimensions L x W x H	Weight KG	Model Code 220VAC 50/60HZ
			Air Gas		liquid		To confi gure	AC 220V	DC 24V			
			AC	DC	AC	DC						
1/8"	1.0	0.04	0-350	0-250	0-350	0-250	M	7	9	47×50×93.5	0.8	SC75MA20K400101
	1.2	0.08	0-300	0-230	0-300	0-230	M	7	9	47×50×93.5	0.8	SC75MA20K4001R1
	1.5	0.14	0-250	0-180	0-250	0-180	M	7	9	47×50×93.5	0.8	SC74MA20K4001R2
1/4"	1.0	0.04	0-350	0-250	0-350	0-250	M	7	9	47×50×93.5	0.8	SC75MA20K400201
	1.2	0.08	0-300	0-230	0-300	0-230	M	7	9	47×50×93.5	0.8	SC75MA20K4002R1
	1.5	0.14	0-250	0-180	0-250	0-180	M	7	9	47×50×93.5	0.8	SC75MA20K4002R2
1/4"	8.0	1.0	0-110	0-90	0-110	0-90	M	7	9	55×59×102	1.16	SC75MA20V400208
3/8"	8.0	1.0	0-110	0-90	0-110	0-90	M	7	9	55×59×102	1.16	SC75MA20V400308
1/2"	8.0	1.0	0-110	0-90	0-110	0-90	M	7	9	55×59×102	1.16	SC75MA20V400408
1/4"	10	2.1	0-350	0-300	0-350	0-300	M	7	9	70×74×140	3.0	SC75MA20K400210
3/8"	10	2.1	0-350	0-300	0-350	0-300	M	7	9	70×74×140	3.0	SC75MA20K400310
	15	3.5	0-350	0-300	0-350	0-300	M	7	9	70×74×140	2.6	SC75MA20K400315
1/2"	10	2.1	0-350	0-300	0-350	0-300	M	7	9	70×74×140	3.0	SC75MA20K400410
	15	3.5	0-350	0-300	0-350	0-300	M	7	9	70×74×140	2.6	SC75MA20K400415
3/4"	20	7	0-300	0-230	0-300	0-230	M	7	9	79×84×150	3.6	SC75MA20K400520
1"	25	11	0-300	0-230	0-300	0-230	M	7	9	93×99×160	5.3	SC75MA20K400625