
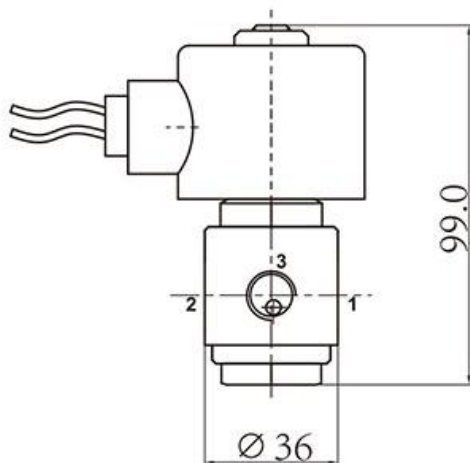
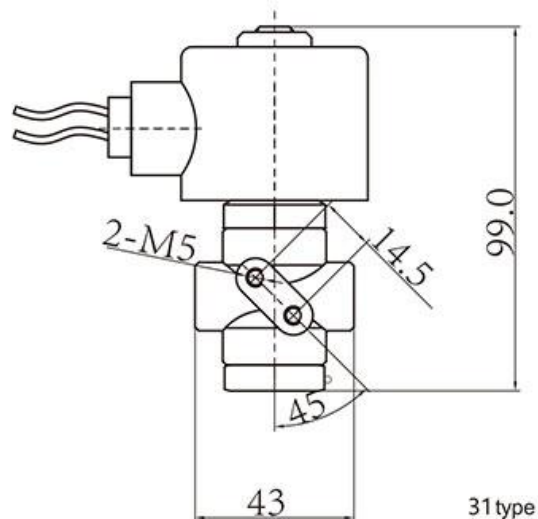
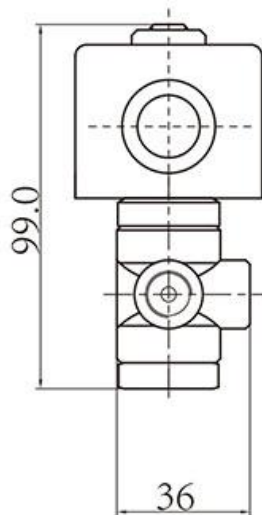


1		2	3	4	5	6	7	8
D62		Coil Types	Voltage	Seal Material	Body Material	Pipe Size	Orifice	Options
D	621	D	A20	N	31	01	04	
D=3/2-Way Direct Acting	621=Normally Closed 622=Normally Open 623=Diverting 624=Universal	D=Plastic molding coil N=Lead plastic forming coil	A24=AC24V A36=AC36V A48=AC48V A10=AC110V A20=AC220V D12=DC12V D24=DC24V D36=DC36V	N=NBR V=VITON E=EPDM	31=Forged brass 40=SS316	01=1/8" 02=1/4"	02=2.0 03=3.0 R2=1.5 R3=2.5 04=4.0	L=Neon Lamp N=NPT Thread

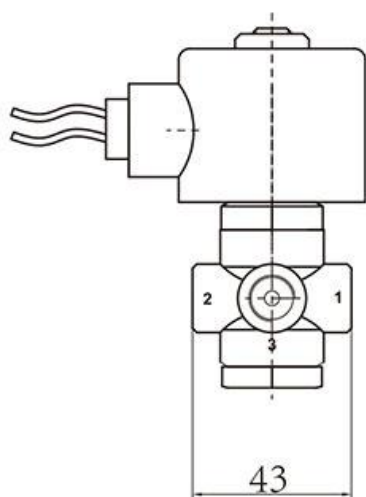

40 type

Product Characteristics

3/2-Way Direct Acting Universal

Can be used for automatic control of neutral gases and liquids

Small volume, large flow and simple structureControl mode: direct drive

Maximum withstand pressure : 20bar

Maximum working pressure : 0~13bar

Standard voltage : AC : 220V/50HZ 240/60HZ ,
AC110V DC : 24V, 12V

Medium temperature : (-10~+130 ℃)

Sealing element :NBR(N)、EPDM(E)、VITON(V)



Pipe Size G	Orifice mm	CV rate	Pressure (bar)				Coil Type	Power		Externsions Dimensions L x W x H	Weight KG	Model Code 220VAC 50/60HZ
			Air Gas		liquid		To confi gure	AC 220V	DC 24V			
			AC	DC	AC	DC						
1/8"	1.5	0.07	0-13	0-11	0-13	0-11	D	22	13	36×43×99	0.42	D624DA20N3101R2
	2.0	0.14	0-11	0-9	0-11	0-9	D	22	13	36×43×99	0.42	D624DA20N310102
	2.5	0.21	0-9	07	0-9	0-7	D	20	13	36×43×99	0.42	D624DA20N3101R3
	3.0	0.25	0-6	0-4	0-6	0-4	D	20	13	36×43×99	0.42	D624DA20N310103
	4.0	0.35	0-3	0-2	0-3	0-2	D	20	13	36×43×99	0.42	D624DA20N310104
1/4"	1.5	0.07	0-13	0-11	0-13	0-11	D	22	13	36×43×99	0.42	D624DA20N3102R2
	2.0	0.14	0-11	0-9	0-11	0-9	D	22	13	36×43×99	0.42	D624DA20N310202
	2.5	0.21	0-9	07	0-9	0-7	D	20	13	36×43×99	0.42	D624DA20N3102R3
	3.0	0.25	0-6	0-4	0-6	0-4	D	20	13	36×43×99	0.42	D624DA20N310203
	4.0	0.35	0-3	0-2	0-3	0-2	D	20	13	36×43×99	0.42	D624DA20N310204

trend chart

