
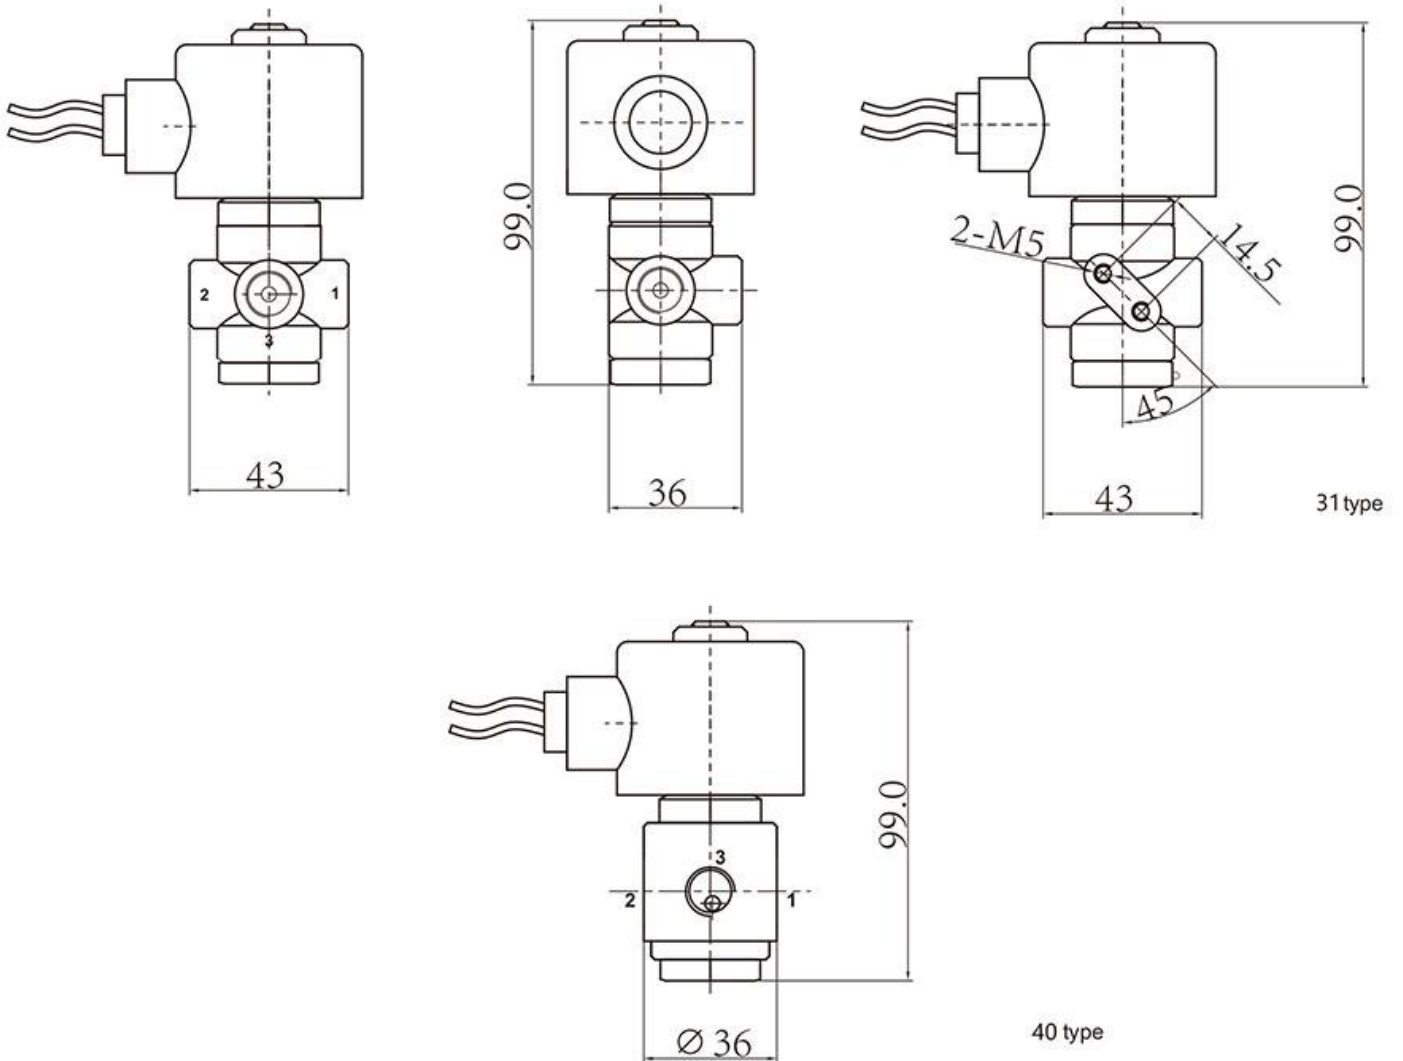


1		2	3	4	5	6	7	8
D62		Coil Types	Voltage	Seal Material	Body Material	Pipe Size	Orifice	Options
D	621	D	A20	N	31	01	04	
D= 3/2-Way Direct Acting	621= Normally Closed 622= Normally Open 623= Diverting 624= Universal	D= Plastic molding coil  N= Lead plastic forming coil	A24=AC24V A36=AC36V A48=AC48V A10=AC110V A20=AC220V D12=DC12V D24=DC24V D36=DC36V	N=NBR V=VITON E=EPDM	31=Forged brass 40=SS316	01=1/8" 02=1/4"	02=2.0 03=3.0 R2=1.5 R3=2.5 04=4.0	L=Neon Lamp N=NPT Thread



### Product Characteristics

- 3/2-Way Direct Acting Universal
- Can be used for automatic control of neutral gases and liquids
- Small volume, large flow and simple structure
- Control mode: direct drive
- Maximum withstand pressure : 20bar
- Maximum working pressure : 0~13bar
- Standard voltage : AC : 220V/50HZ 240/60HZ , AC110V DC : 24V, 12V
- Medium temperature : (-10~+130 °C)
- Sealing element :NBR(N)、EPDM(E)、VITON(V)



### Valve Selection Lis

Pipe Size G	Orifice mm	CV rate	Pressure ( bar )				Coil Type To confi gure	Power		Externsions Dimensions L x W x H	Weight KG	Model Code 220VAC 50/60HZ
			Air Gas		liquid			AC 220V	DC 24V			
			AC	DC	AC	DC						
1/8"	1.5	0.07	0-7	0-5	0-7	0-5	D	22	13	36×43×99	0.42	D623DA20N3101R2
	2.0	0.14	0-5	0-4	0-5	0-4	D	22	13	36×43×99	0.42	D623DA20N3101O2
	2.5	0.21	0-4	0-3	0-4	0-3	D	22	13	36×43×99	0.42	D623DA20N3101R3
	3.0	0.25	0-3	0-2	0-3	0-2	D	22	13	36×43×99	0.42	D623DA20N3101O3
	4.0	0.35	1.5	0.8	1.5	0.8	D	22	13	36×43×99	0.42	D623DA20N3101O4
1/4"	1.5	0.07	0-7	0-5	0-7	0-5	D	22	13	36×43×99	0.42	D623DA20N3102R2
	2.0	0.14	0-5	0-4	0-5	0-4	D	22	13	36×43×99	0.42	D623DA20N3102O2
	2.5	0.21	0-4	0-3	0-4	0-3	D	22	13	36×43×99	0.42	D623DA20N3102R3
	3.0	0.25	0-3	0-2	0-3	0-2	D	22	13	36×43×99	0.42	D623DA20N3102O3
	4.0	0.35	1.5	0.8	1.5	0.8	D	22	13	36×43×99	0.42	D623DA20N3102O4

### trend chart

